

# FIBREVISION FIBRE TQS. SPANDEX QUALITY MONITORING.

## ON-LINE MONITORING.

**FibreTQS is a unique On-Line Monitoring system for the Spandex / Elastomer process providing the users with clear operational and downstream benefits, both enhancing reputation and reducing costs.**

### FibreTQS Sensors

The FibreTQS system comprises several components:

#### Sensors

Optical sensors measure the profile variation of the yarn allowing identification of:

- Denier / Twist Variation, a very sensitive measurement of the short term variation in the profile of the yarn associated with: Air Faults, General Process Instability, Weld Spots and Slubs
- Denier Change, identifies Filament Crossovers
- Broken Filaments Identifies Broken Filament and Slub problems

#### Electronics

The sensors connect to Distributed Electronics and carry out all high-speed data acquisition and signal processing as well as providing a range of I/O functions

#### PC Software

A simple intuitive user interface with a mimic display of the machine provides the current status of the machine at a glance. Details of this are shown under user interface below.

#### Plant Integration

Provides facilities for data export and control of multiple FibreTQS machines from a single PC.

The screenshot displays a software window titled "Production report for All Merges, 01/07/06 - 01/08/06". It contains several data tables and control elements.

Summary by Weight				Summary by Grade							
No	%	Weight	%	Grade	No	%	Weight				
Full Packs	18189	26.21	175024.02	45.48	1st	85620	87.35	350444.38	93.66		
Break Packs	1529	2.20	4006.51	1.04	2nd	0	0.00	0.00	0.00		
All Packs	68396	100.00	384642.15	100.00	3rd	0	0.00	0.00	0.00		
Break Rate (per Kg) 0.00				4th				2168	2.19	1486.15	0.39
				Reject				6028	6.03	22270.84	5.79

Threadline	Pack ID	Duff No.	Events	Duff Code	Grade	Reason	Bulk %	Weight (g)	Exceed At	B. Fil
165	494	2558	7	Duff	4th	BF	77.9	6.97	19/07/2006 14:55:08	40
165	497	2571	9	Duff	4th	BF	77.89	6.97	19/07/2006 18:10:19	84
165	513	2603	8	Duff	4th	BF	109.27	9.1	20/07/2006 16:59:43	80
165	620	2803	8	Duff	4th	BF	48.96	4.38	20/07/2006 20:00:00	15
167	404	2402	8	Cut	4th	BF	9.29	0.84	12/07/2006 16:47:38	118
167	406	2403	9	Duff	4th	BF	76.95	6.88	12/07/2006 19:41:49	105
167	411	2422	6	Duff	4th	BF	87.25	8.03	13/07/2006 09:43:53	82

At the bottom, there are controls for "Pack List Selection: Select Grade and Pack Size" (2198 of 8338 Packs Selected), "Grade Select" (All Grades, 1st Quality, 2nd Quality, 3rd Quality, 4th Quality, Reject), and "Pack Size Select" (All Sizes, Full Duff, Short Duff, Break Packs). A "Display Invalid Packs" checkbox is also present.



### FibreTQS Grading and Reporting

FibreTQS continuously monitors data from the sensors and identifies all quality events. Based on these faults the packages are graded based on the limits and grading criteria defined in the Merge Setpoints and appropriate actions taken e.g.: output activated to cut the end or illuminate a warning lamp. The key grading limits available in the merge setpoints are:

#### Mean Variation

The minimum, maximum and CV values are checked against mean data.

#### Transient Faults

Minimum and maximum limits are checked against each individual reading and in the case of a fault, a graph of the event is captured.

#### Slubs and Broken Filaments

Grading is based on the number of Slub events, and/or the total number of Broken Filaments per Package.

On the basis of the faults identified, FibreTQS automatically assigns a quality grade to the packages (Grade 1, 2, 3, 4 or Reject). This quality grade is displayed at the machine PC and can be transmitted automatically to any automatic handling / packing system immediately when the package is doffed.

### Saurer FibreRevision Ltd.

Heather Close, Lyme Green, Macclesfield SK11 0LR, Cheshire, UK  
T +44 1625 425355, F +44 1625 662252  
sales.fibrerevision@saurer.com, www.saurer.com

**SAURER.**  
FibreRevision

# Fibrevision® FibreTQS

## Flexible Reporting

A range of reports are available to summarise package quality and off quality events; by machine, merge group, winder, or threadline over flexible time periods. Full shift reporting facilities are included. These reports summarise the number and weight of packages in each grade and allow lists of packages in selected grades to be printed.

When viewing these reports on screen it is possible to view / print details of:

- Off quality events for any selected package
- Package summary data for each property
- Trend data for each property for the duration of the package

## FibreTQS User Interface

FibreTQS provides a graphical display of the machine layout that indicates both threadline running status and quality grade by the colour of the package icons.


Clicking on a winder icon displays details of the current readings and clicking on individual threadlines provides:

- Current readings
- Summary data for the package to date
- Details of off quality events
- Real Time View graph
- Analysis tools to aid troubleshooting
- Quality Reports from previous packages
- Access to historical trend data

## FibreTQS – Typical Spandex Data

Typical denier variation data from stable and unstable threadline is shown in the trend data graphs below.

The black line represents the mean data values whilst the red lines represent the minimum and maximum values (Charts 1&2).

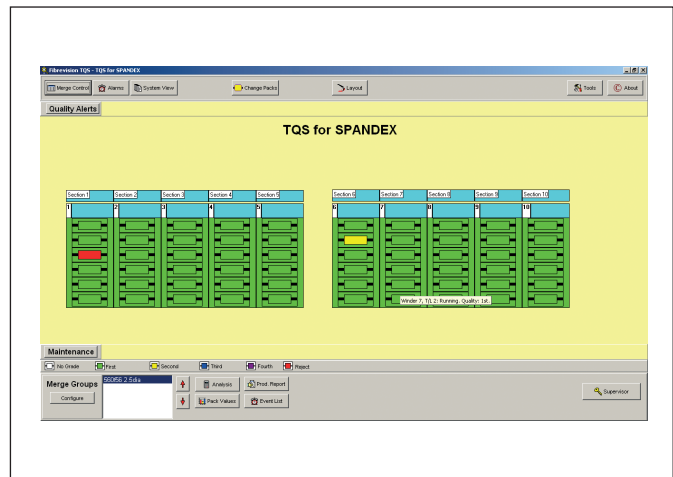

User Interface

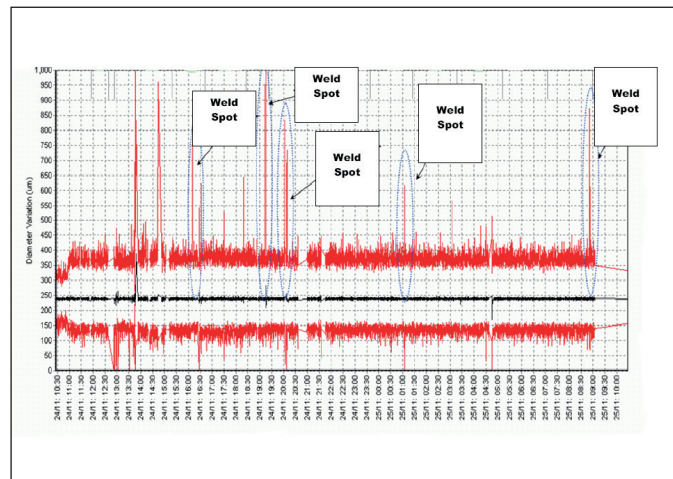


Chart 1: Unstable process data

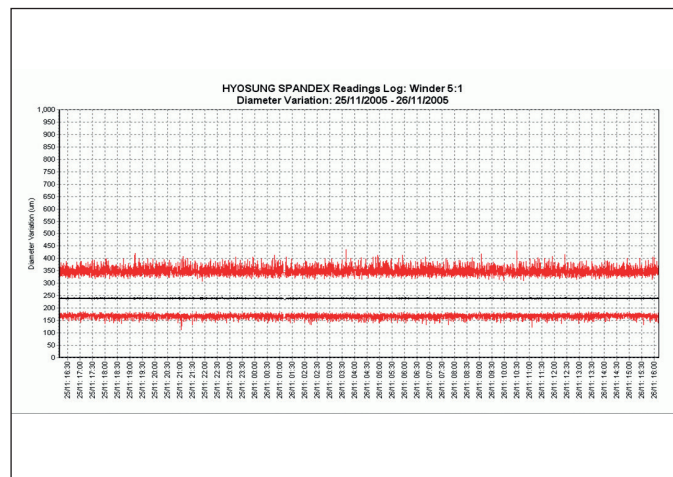


Chart 2: Stable process data